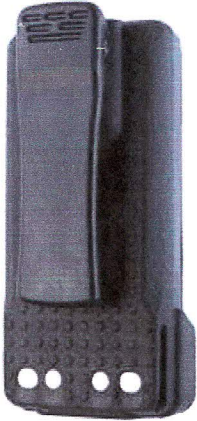


# MULTIPLIER™

|                                   |                  |
|-----------------------------------|------------------|
| <b>LMR BATTERY SPECIFICATIONS</b> | PART NUMBER      |
|                                   | <b>C4409LIIC</b> |

|                          |  |
|--------------------------|--|
| COMPATIBLE RADIOS        | Motorola APX4000, XPR3300, XPR3500, XPR7350, XP7550, DP440, DP4401, DP4600, DP4601, DP4800, DP4801 |
| REPLACES OEM BATTERY     | PMNN4409   |
| COMPATIBLE CHARGER / POD | Endura TWC1-MT16 / TWP-MT16<br>Also compatible with Motorola Adaptive Impres™ Charger              |
| VOLTAGE                  | 7.2V   |
| CAPACITY                 | 2500 mAh   |
| CHEMISTRY                | Li-Ion   |
| CELL TYPE                | Sanyo, Panasonic, or equivalent  |
| OPERATING TEMPERATURE    | -20° C to +60° C (discharge) / 0° C to +40° C (charge)   |
| CHARGE CYCLES            | 300  |
| CHARGE TYPE              | Rapid  |
| CONDITIONER COMPATIBLE   | Yes  |
| THERMAL PROTECTION       | Yes  |
| HOUSING MATERIAL         | ABS  |
| HOUSING SEAL             | Ultrasonic weld  |
| METAL WELDING            | Pure nickel tabs w/ spot welder  |
| CLIP                     | Included   |
| WARRANTY                 | 12 months  |
| PRODUCT PHOTO            |                |

## Sandown Wireless

19 Phillipswood Road  
Sandown, NH 03873

Your Battery Expert: Keith S. Clark  
Office: 603-425-9876  
E-mail: keith@criticalbattery.com  
Web: www.criticalbattery.com